
PRODUCT DATASHEET

Product Name :	*KNX DIMMING ACTUATOR 2 GANG 300W DM102 BIS*
Product Code :	*WRKT5512E*
Product Series :	KNX Thea IQ
Technical Specifications:	
KNX Medium	*TP1*
Mode of commissioning	*S-Mode*
KNX supply	*21-32 V DC*
Mains supply	*230 V AC*
Mains frequency	*50 Hz*
Installation type	*DIN rail*
Mounting width	*2 channels -72 mm 4 modules*
Ambient temperature	*–5°C ... + 45 °C*
Storage temperature	*–25 °C ... + 55 °C*
Transportation temperature	*– 25 °C ... + 70 °C*
Load Type	

	Load			
ETS Parameter	HV halogen, Incandescent lamps	LV halogen, 12V-LED via ferromagnetic transformer (inductive)	LV halogen, 12V-LED via electronic transformer (capacitive)	LED (Retrofit), CFL
Universal	✓	✓	✓	⊘
Capacitive (phase cut off)	✓	⊗	✓	✓
Inductive (phase cut on)	✓	✓	⊘	✓


✓	Usage po
⊘	Usage no
⊗	Usage is

Wiring Diagram:

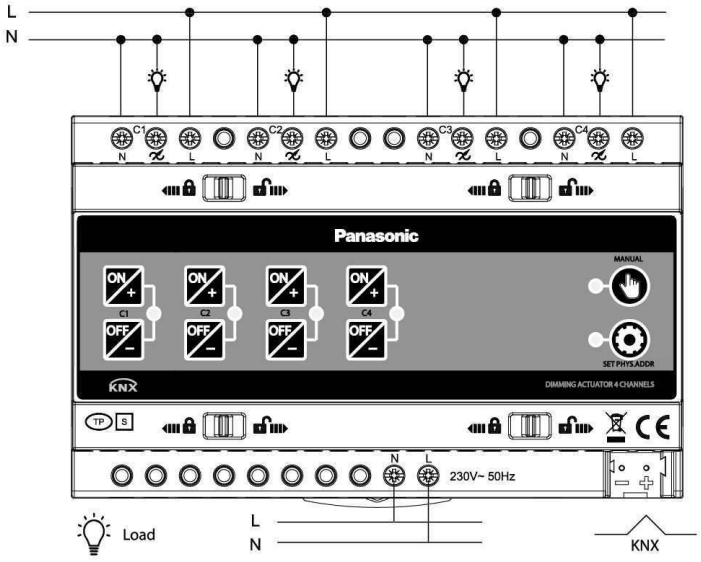

Dimensions:



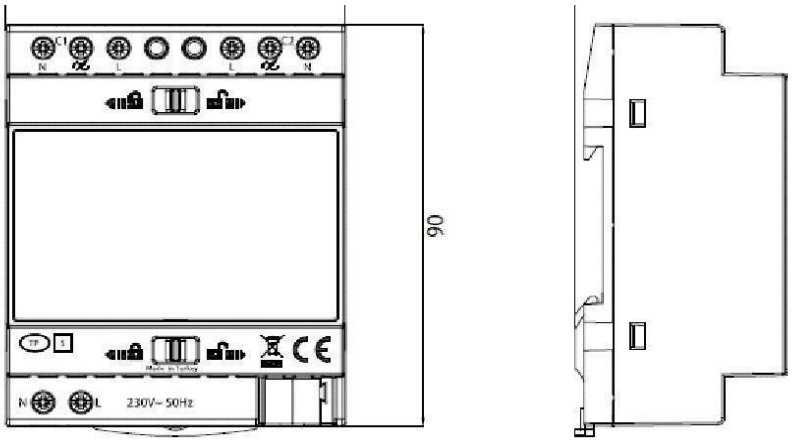

Panasonic Electric Works Elektrik.San. ve Tic. A.Ş.
Abdurrahmangazi Mah. Ebubekir Cad. No: 44 Sancaktepe / İstanbul Tel: 0216 564 55 55 Fax: 0216 564 55 44
ewtr.panasonic.com

Panasonic



ossible
ot recommended
not possible (Device damage)

